



VIDHARBHA KONKAN GRAMIN BANK
Govt. of India, Bank of India & Govt. of Maharashtra Undertaking

Regional Office, Ratnagiri : 729 P, Bhairavnath krupa opp. Aparadh Hospital, Majgaon Road, Maruti mandir, Ratnagiri-415 612. Telephone No. 222066, 221378 Fax No. (02352) 220214 E-mail : vkgb.rorat@gmail.com

VKGB/RORAT/A&S/WEBTENDER/2017-18/01

Date. 09/06/2017.

TENDER NOTICE FOR ELECTRICAL & DATA CABLING WORK OF OSARGAON BRANCH.

1. Vidharbha konkan Gramin Bank, Regional office, Ratnagiri is inviting sealed tender of Electrical & Data Cabling work of our Branch at Osargaon, Tal-Kankavali, Dist- Sindhudurg. Sealed tenders should be addressed to "The Regional Manager, Vidharbha Konkarn Gramin Bank, Regional office, 729 P, Bhairavnath krupa opp. Aparadh Hospital, Majgaon Road, Maruti Mandir, Ratnagiri-415 612. **Contact No..(02352) 222066, 221378, E-mail : vkgb.rorat@gmail.com**
2. Tenders should superscribed "**TENDER FOR ELECTRICAL & DATA CABLING WORK FOR PHANSGAON BRANCH**" and should reach to us from 25/06/2017 to 03/07/2017, but not later than 2.00 p.m. No Tender will be accepted after given date and time. Estimated cost is Rs. 1.39lakh
3. Only those contractors / firms who are on the panel of the Bank or erstwhile Wainganga Krishna Gramin Bank, Nationalized Bank are eligible to participate in this tender.
4. Following documents are required to be submitted with tender,
 - a) Registration certificate of the firm / company.
 - b) Copy of audited statement of current financial year.
 - c) PAN card.
 - d) Full details of the Bank Account.Tenders received without stated documents are not considered for the process.
5. Tenderors will have to quote their rate for all items given in measurement sheet and it's abstract. Conditional tenders are liable for rejection.
6. The tender shall be valid for a period of 30 days from the last date of submission.
7. The Bank is not bound to accept the lowest tender and reserve the right to accept the tender either in full or in part of any tender. The bank also reserves its right to reject all the tenders without assigning any reason thereof.
8. Furniture lay out, Description & measurement of electrical items and list of approved material (Specification) to be used are enclosed with this.


(R.R. Khade)

**Regional Manager,
Vidharbha Konkarn Gramin Bank,
Ratnagiri Region**

Head Office: - "Chandraprastha", 2nd & 3rd floor plot no.6, Deendayal Nagar, Ring Road Nagpur- 440022 (MS)
Phone No. (0712) 2224319 ,20 ,21 ,22 Fax No.(0712) 2224306, 07
E-mail: vkgb.ho@gmail.com Web- www.vkgb.co.in

SPECIFICATIONS

- | | | | |
|-----|--------------------|---|------------------------------|
| 1. | PVC | - | Precision / Garware |
| 2. | Casing Capping | - | Presto make or equivalent |
| 3. | PVC WIRE | - | Polycab / Vinay |
| 4. | Al. Lugs | - | DOWELL/ REPUTED |
| 5. | Cable Glands | - | BRACCO / SMT/ HMT |
| 6. | Eath strip/ wire | - | EC GRADE |
| 7. | Cables | - | POLYCAB |
| 8. | Switches (regular) | - | Anchor / Vinay |
| 9. | MCD/ DB | - | Havell's / Altech |
| 10. | Fittings | - | Approved Make |
| 11. | Ceiling & Ex. Fan | - | Bajaj make or equivalent |
| 12. | Speaker | - | Philips or equivalent |
| 13. | Switches | - | Anchor / Vinay |
| 14. | Any Other | - | To be approved by consultant |

DATA CABLING

1. CAT – 6 - UTP cable
2. PVC conduit pipe 2 mm thk – 25 mm
3. PVC conduit pipe 2 mm – 38 mm
4. Heavy duty PVC CAPON of 25 mm width.
5. Patch cords UTP – 7 feet length
6. I / O boxes.
- 7. RJ 45 connectors.

कृते विदर्भ कोकण ग्रामीण बँक
For Vidharbha Konkani Gramin bank
क्षेत्रीय कार्यालय, रातनागिरी
Regional Office, Ratnagiri

क्षेत्रीय प्रबंधक / Regional Manager

BILL OF QUANTITIES

Name of the Project: - Proposed Electrical work for Vidharbha Konkan Gramin Bank, Osargaon Branch.

No.	Item	Qty.	Per	Rate	Amount
	<u>OPEN</u>				
1.0	<u>MAIN PANEL / DISTRIBUTION BOARD.</u>				
1.1	. <u>UPS INPUT D.B. - S & I of 12way SPN, DB similar to above but for distribution of INPUT POWER to UPS having below mentioned switchgears (MDS 607702) MDS LEXIC</u> a. 1 no,- 40A, DP, Isolator incomer b. 2 Nos.- 16A, SP, MCB FOR Power circuit c. 8 nos - 10A SP MCB Lighting circuit	1.00	Set		
1.2	<u>UPS INPUT D.B. – S & I of 12way SPN, DB similar to above but for distribution of INPUT POWER to UPS having below mentioned switchgears (MDS 607702) MDS LEXIC</u> a. 1 no,- 40A, FP, Isolator incomer d. 2 Nos.- 32A, DP, MCB, UPS input e. 1 Nos. – 20A DP MCB for Inverter input	1.00	Set		
1.3	<u>UPS OUTPUT D.B. – S & I of 8way SPN, DB similar to above but for distribution of INPUT POWER to UPS having below mentioned switchgears (MDS 607701) MDS LEXIC</u> a. 1 no,- 40A, DP MCB, incomer b. 6 nos, - DP, MCB, for outgoing	1.00	Set		
1.4	S & I of 20A, metal clad 3 pin socket with plug to MDS 607841	1.00	No.		
1.5	60A 4Pole ELCB + with enclosure	0.00	No.		
1.6	60A SP MCB with enclosure	2.00	No.		
1.7	Inverter input and output DB- 4way SPN a. 25 A 2pole MCB for input b. 10A SP MCB 2nos. for out going	1.00	No.		
2.0	<u>CABELS / MAINS</u>				
2.1	S & I of 1100V grade armoured cable having sector / circular shaOsargaon aluminum / copper conductor PVC insulated cores, laid up, PVC tape wrappe and inner sheathed, GI strip/wire armoured and overall extruded PVC sheathed confirming to IS: 1554, laid on wall / ceiling using G.I. clamps & spacers as per route shown at site and further directed by the Consultant at site in following sizes.				
2.1.1	3C x 6 Sqm. Copper flexible for Main DB to UPS Input DB	10.00	Mtr.		
	3C x 1.5 Sqm. Copper flexible for UPS output wiring.	150.00	Mtr.		
2.1.2	2 x 2.5 sqm. wire + 1x1.0 sqm. earth wire for Light board Primary circuit wiring.+ Inverter main	170.00	Mtr.		
2.1.4	2 x 1.5 Sqm. wire + 1 x 1.0 sqm. wire for Secondary Light circuit main.	160.00	Mtr.		
2.1.5	2x1.0 sqm. wire for running more than 20' light points / fan / bell / exhaust fan points.	60.00	Mtr.		
2.1.6	2X4 sqmm+ 1 x 2.5 sqm. Earth wire from lighting DB to AC Points	0.00	Mtr.		


 Regional Office, Rainnagar
 क्षेत्रीय कार्यालय / Regional Manager


5.1.	S & I of earth pit comprising of 300mm x 300mmx 3.4mm. thick copper plate buried at a minimum depth of 2.5 meter including necessary materials like charcoal, salt etc as required conforming to BIS standards having brick masonry, chamber with hinged cover and watering arrangement	2.00	No.		
5.2	10 SWG copper bare wire in heavy gauge PVC Conduit pipe. (from earth pit to Main D.B. & Earth pit to UPS o/p D.B.)	10.00	Mtr.		
6.0	WIRING FOR DATA AND VOICE OUTLETS				
6.1	Providing Telephone point wiring with 2 pair telephone wire and Regular type Jack type telephone socket complete. stations.	4.00	Pts		
6.2	Providing and laying Cat-6 cable for data point in heavy gauge PVC conduit pipe from server room to individual work stations.	100.00	Mtr.		
6.3	Providing and fixing CAT-6 Information out let with TR mounting box	0.00	Pts		
6.4	Providing and fixing CA-6 Patch chord.	5.00	No.		
6.5	Running 2 pair telephone wire in PVC conduit pipe for Telephone points.	100.00	Mtr.		
	Total				

(In words Rupees _____).

कृते विदर्भ कोकण ग्रामीण बँक
For Vidharbha Koakan Gramin bank
क्षेत्रीय कार्यालय, रात्रागिरी
Regional Office, Ratnagiri


क्षेत्रीय प्रबंधक / Regional Manager

ALT. NO- 1

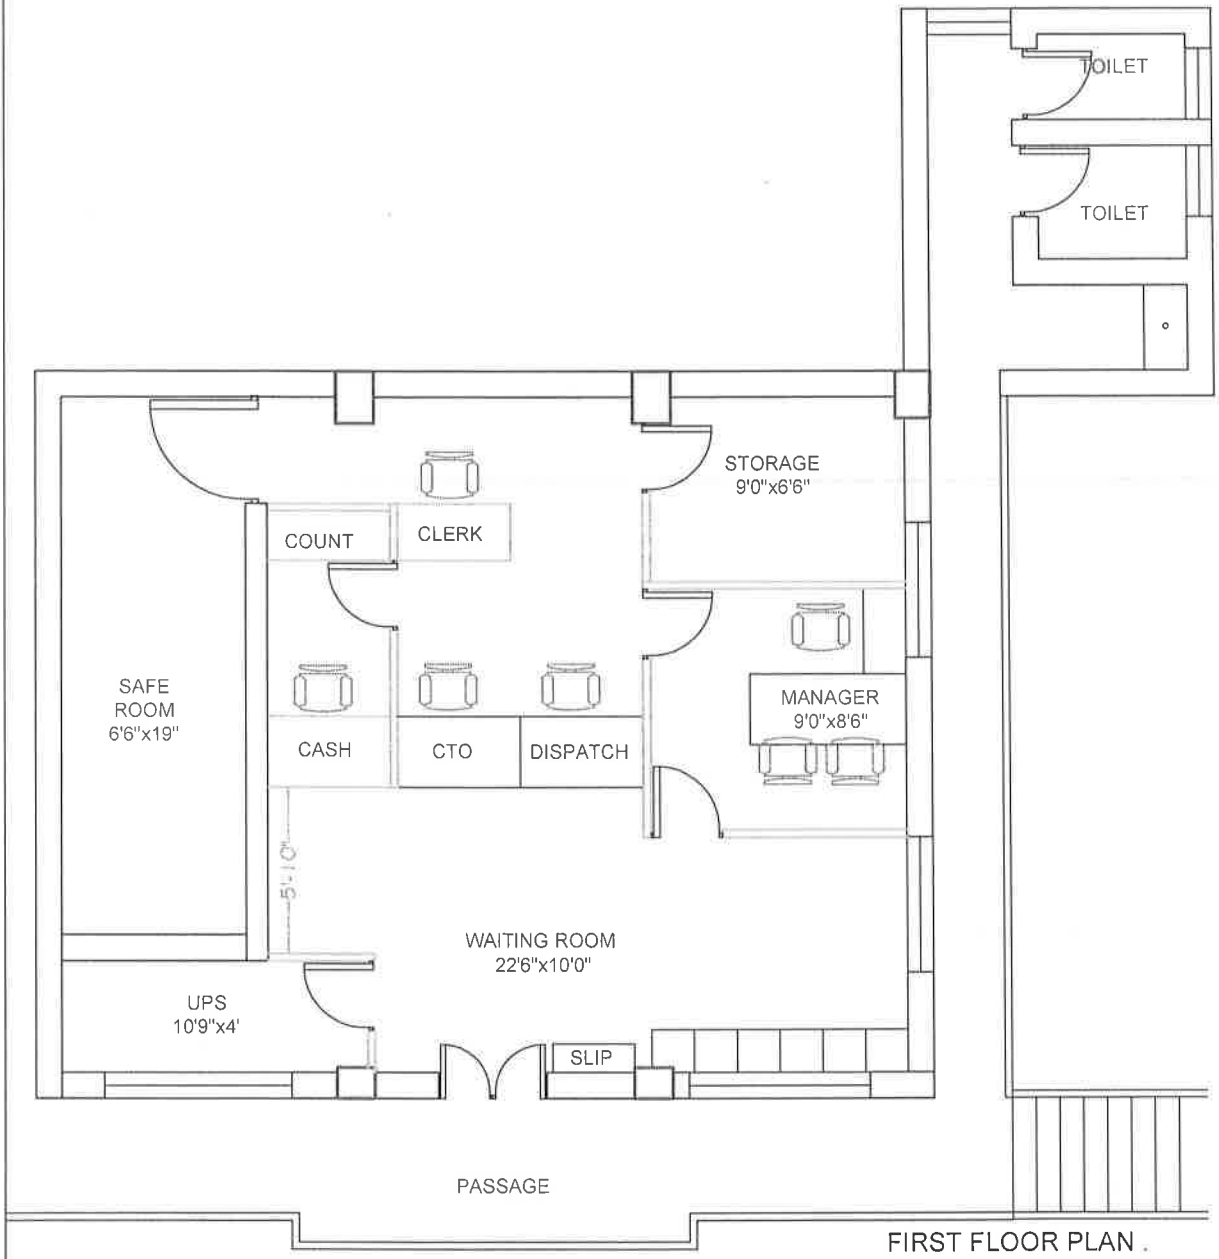

FIRST FLOOR PLAN .

PROPOSED LAYOUT FOR VIDHARAB KOKAN GRAMIN BANK, BRANCH AT ORASGOAN, KANKWALI, SINDHUDURG.

13/05/2017
NORTH


GAP ASSOCIATES
ARCHITECTS & INT. DESIGNERS
1882 , 'E', BI, SHUBHAM PLAZA,
9TH LANE, R'PURI, KOLHAPUR.
PH. NO. 9822011081



For Vidharab Kokan Gramin Bank
Regional Office, Sindhudurg
क्षेत्रीय प्रबंधक / Regional Manager

[Signature]

ALT. NO- 1

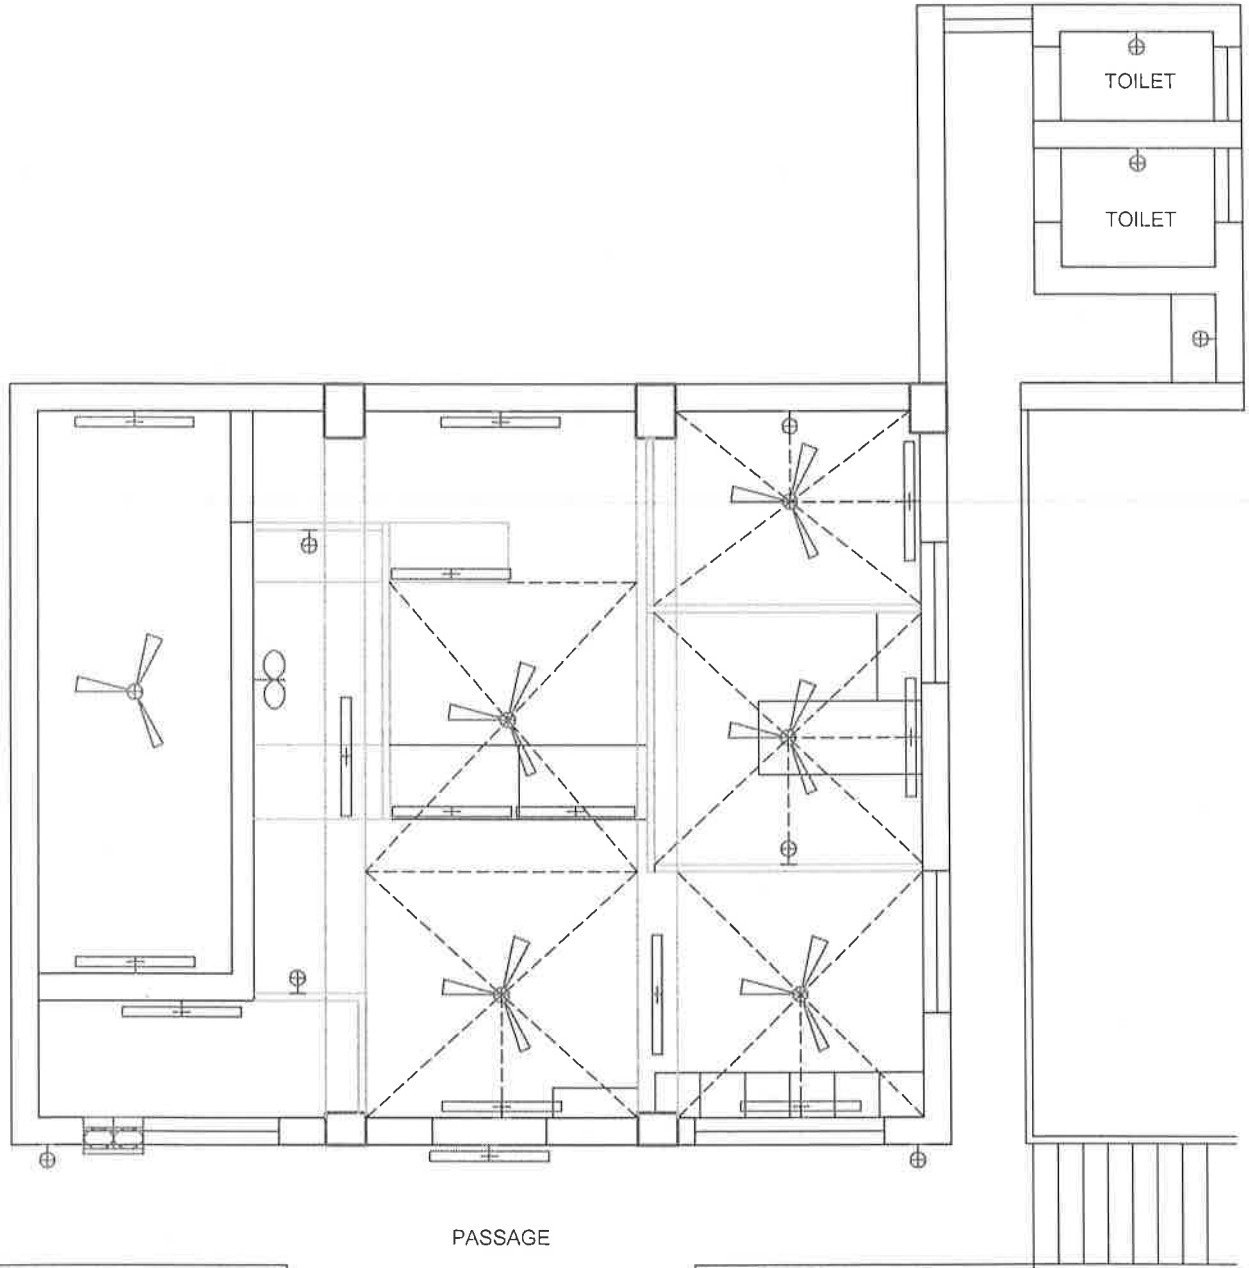

FIRST FLOOR PLAN.

PROPOSED LAYOUT FOR VIDHARAB KOKAN GRAMIN BANK, BRANCH AT ORASGOAN, KANKWALI, SINDHUDURG.

13-05-2017
NORTH



GAP ASSOCIATES
ARCHITECTS & INT. DESIGNERS
1882, 'E', BI, SHUBHAM PLAZA,
9TH LANE, R'PURI, KOLHAPUR.
PH. NO. 9822011081

कृते विदर्भ कोकण ग्रामीण बँक
For Vidharbha Kenkan Gramin bank
क्षेत्रीय कार्यालय, रत्नागिरी
Regional Office, Ratnagiri
[Signature]
क्षेत्रीय प्रबंधक / Regional Manager